



SLOT FORMED AND RECESSED FOR 5/8" - 11 NC x 2" S.S. SOCKET HEAD (ALLEN HEAD) CAP SCREW.

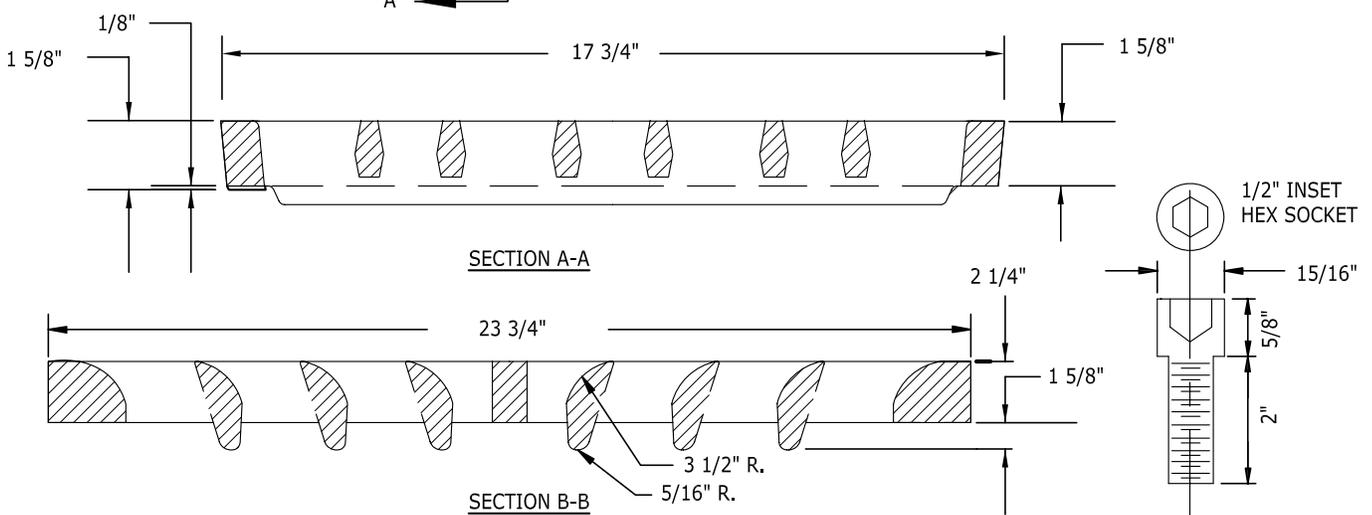

NOTES:

1. PROVIDE FRAME SHOWN STANDARD PLAN 5-4.
2. FOR THRU CURB INLETS AT LOW POINTS, USE 2-WAY VANED GRATE.
3. GRATE SHALL BE STAMPED "DUMP NO POLLUTANTS", "OUTLET TO STREAM".
4. ALL LETTERING SHOWN SHALL BE 1/2" AND SHALL BE RECESSED.
5. DUCTILE IRON ASTM A-536 GRADE 80-55-06 H-20 RATED.
6. GRATE SHALL BE LOCKING.
7. PROVIDE 2-5/8" DIAMETER STAINLESS STEEL ALLEN TYPE BOLTS COUNTER SUNK FLUSH WITH COVER.

NOTE: THIS PLAN IS NOT A LEGAL ENGINEERING DOCUMENT BUT AN ELECTRONIC DUPLICATE. THE ORIGINAL, SIGNED BY THE ENGINEER AND APPROVED FOR PUBLICATION IS KEPT ON FILE AT THE CITY OF KENT. A COPY MAY BE OBTAINED UPON REQUEST.

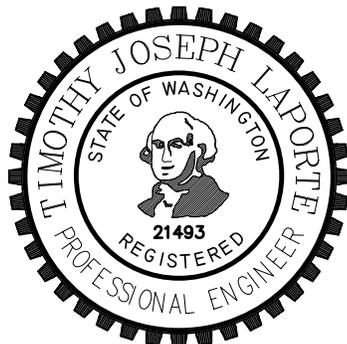

		CITY OF KENT ENGINEERING DEPARTMENT	
		18" x 24" 2-WAY VANED GRATE	
DESIGNED <u>DWH</u>	SCALE <u>NONE</u>	STANDARD PLAN 5-6	
DRAWN <u>BB</u>	DATE _____		
CHECKED _____	ENGINEER _____		
APPROVED _____			